

## Homework 2: Lab Activity

### TCP/IP Network Monitoring and Management

Hw 2 Assigned on 2017/8/29, Due 2017/9/7

#### Hand-In Requirement

- Prepare a activity/laboratory report (name it **Hw2-WebSys-YourName.docx**) using the ECET Lab report guideline found at <http://www.etc.edu/~lin/InfoForAllCourses/laboratoryreport.htm>; make sure that you copy all activity/question and results in the DATA section
- Due **September 7, 2017** , submit Hw2-WebSys-YourName.docx file an email attachment to Prof. Lin at [lin@ipfw.edu](mailto:lin@ipfw.edu)

#### Introduction:


TCP/IP network management tasks include

- Traffic monitoring
- Troubleshooting network access
- Adding new hosts (also known as nodes or stations) to the network
- Mounting remote disks and exporting local disks with Network File System (NFS)

Large networks probably need a commercial network analyzer, or at least a hardware tester such as a time domain reflectometer (TDR). But many smaller networks can get by with publicly available free tools. A list of diagnostic service functions for helping network monitoring, management, and troubleshooting are as shown below.

- Testing the network connection: **ping** command (for both Windows and UNIX)
- Troubleshooting Network Access using: **winipcfg** command (Windows), **ifconfig** (UNIX), **netstat**, and **arp** command
- Configure the network interface: **winipcfg** command (Windows), and **ifconfig** (UNIX)
- Network monitoring: **netstat** command (for both Windows and UNIX)
- Display active network connections: **netstat** command (for both Windows and UNIX)
- Display interface statistics: **netstat** command (for both Windows and UNIX)
- Display active routes of connections: **route** command (for both Windows and UNIX)
- Manipulate static routing tables: **route** command (for both Windows and UNIX)
- Tracing routes: **tracert** command (Windows), **traceroute** command (UNIX)

For a Windows 7, 8, or 10-based PC, these networking commands are available from the “command prompt” window. You can access it by clicking on the **window icon** (located at the lower left **taskbar** of the Windows Desktop), and enter **command** or **cmd**; and you will see the Windows’s Command Window similar to the one below:

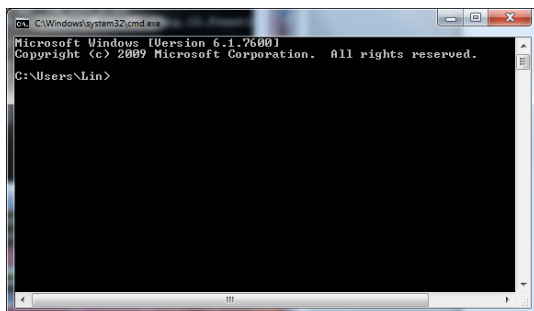

### Activity 1 and Question 1:


You are asked by the CIO of a small company of less than 200 employees to find a “network analyzer”. Search the Internet for at least three products (can be software-based or hardware-based), create a table to show a feature comparison of at least three products, and prepare your recommendation for the order.

### Activity 2. Network Management Commands

Under Window OS, you can try and get help to see how to use network management commands. For example, the **netstat** command can be used to check network configuration and monitor a system's TCP/IP network activity. It will provide a variety of information on how much and what kind of network activity is going on.

The **netstat** command syntax can be found by entering the following command under the MS Command Prompt (an example of Windows 7 machine):

C:\Users\Lin>netstat ?

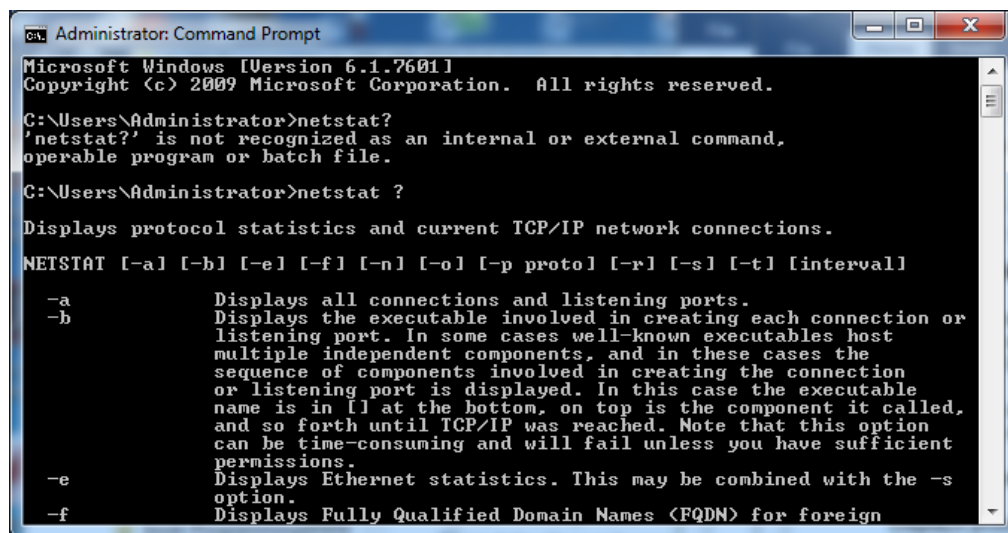

```
Administrator: Command Prompt
Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\Administrator>netstat?
'netstat?' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\Administrator>netstat ?

Displays protocol statistics and current TCP/IP network connections.

NETSTAT [-a] [-b] [-e] [-f] [-n] [-o] [-p proto] [-r] [-s] [-t] [interval]

-a          Displays all connections and listening ports.
-b          Displays the executable involved in creating each connection or
           listening port. In some cases well-known executables host
           multiple independent components, and in these cases the
           sequence of components involved in creating the connection
           or listening port is displayed. In this case the executable
           name is in [] at the bottom, on top is the component it called,
           and so forth until TCP/IP was reached. Note that this option
           can be time-consuming and will fail unless you have sufficient
           permissions.
-e          Displays Ethernet statistics. This may be combined with the -s
           option.
-f          Displays Fully Qualified Domain Names <FQDN> for foreign
```

#### Activity 2A. Enter the following commands

- **netstat**
- **netstat -e**
- **netstat ?**
- **netstat -rn**
- Enter proper commands for the following networking information of your computer, and copy all display results to your activity report:
  - Displays all connections and listening ports of your computer, also find the HTTP connection port.
  - Display your computer's Ethernet statistics
  - Display address and port number of your own computer in numerical format
  - Show connections for the protocol specified by TCP protocol
  - Show routing table that stored in your computer
  - Display fully Qualified Domain Names for foreign addresses
  - Display per-protocol statistics

### IPCONFIG Command

To detect bad IP addresses, incorrect subnet masks, and improper broadcast addresses, the **ipconfig** command can be used to obtain a copy of basic configuration of the interface.

The ipconfig command can also be used for changing setup of the network adapter (<https://technet.microsoft.com/en-us/library/bb490921.aspx>).

### Activity 2B:

- Type **ipconfig ?** to show all command options; then copy all display results to your activity report.
- Use Ipconfig command with all the provided options, <https://technet.microsoft.com/en-us/library/bb490921.aspx>
- Write a short summary of lesson learned.

### Ping Command

The ping command verifies whether a remote host can be reached. It also shows statistic about packet loss and delivery time. The **ping** command is design for troubleshooting and tracking a single-point hardware or software failure in the Internet. When called, the ping command sends one datagram per second and print one line of output for every ECHO\_RESPONSE returned; it sends a message to the designated host and then informs you whether the message was successfully transmitted.

This command is designed for use in network testing, measurement, and management. It was originally used in the UNIX-based networks to see if a remote host is up and responding, and for manual fault isolation. However, it is also found in the Windows based computer systems. The Windows version of ping command is as listed below:

### C:\Users\Lin\Documents>ping

```
Usage: ping [-t] [-a] [-n count] [-l size] [-f] [-i TTL] [-v TOS]
          [-r count] [-s count] [[-j host-list] | [-k host-list]]
          [-w timeout] [-R] [-S srcaddr] [-4] [-6] target_name
```

#### Options:

-t	Ping the specified host until stopped. To see statistics and continue - type Control-Break; To stop - type Control-C.
-a	Resolve addresses to hostnames.
-n count	Number of echo requests to send.
-l size	Send buffer size.
-f	Set Don't Fragment flag in packet (IPv4-only).
-i TTL	Time To Live.
-v TOS	Type Of Service (IPv4-only. This setting has been deprecated and has no effect on the type of service field in the IP Header).
-r count	Record route for count hops (IPv4-only).
-s count	Timestamp for count hops (IPv4-only).
-j host-list	Loose source route along host-list (IPv4-only).
-k host-list	Strict source route along host-list (IPv4-only).
-w timeout	Timeout in milliseconds to wait for each reply.
-R	Use routing header to test reverse route also (IPv6-only).
-S srcaddr	Source address to use.
-4	Force using IPv4.
-6	Force using IPv6.

The LINUX version of ping command can be obtained by typing the command at the command line.

```
[lin@paullinux lin]$ ping
```

```
usage: ping [-LRdfnqrv] [-c count] [-i wait] [-l preload]
          [-p pattern] [-s packetsize] [-t ttl] [-I interface address] host
[lin@paullinux lin]$ ping -c 10 www.mit.edu
PING DANDELION-PATCH.MIT.EDU (18.181.0.31): 56 data bytes
64 bytes from 18.181.0.31: icmp_seq=0 ttl=242 time=59.0 ms
64 bytes from 18.181.0.31: icmp_seq=1 ttl=242 time=45.6 ms
64 bytes from 18.181.0.31: icmp_seq=2 ttl=242 time=48.6 ms
64 bytes from 18.181.0.31: icmp_seq=3 ttl=242 time=50.4 ms
64 bytes from 18.181.0.31: icmp_seq=4 ttl=242 time=47.5 ms
64 bytes from 18.181.0.31: icmp_seq=5 ttl=242 time=65.8 ms
64 bytes from 18.181.0.31: icmp_seq=6 ttl=242 time=54.7 ms
64 bytes from 18.181.0.31: icmp_seq=7 ttl=242 time=48.5 ms
```

```
64 bytes from 18.181.0.31: icmp_seq=8 ttl=242 time=51.6 ms
64 bytes from 18.181.0.31: icmp_seq=9 ttl=242 time=48.9 ms
```

--- DANDELION-PATCH.MIT.EDU ping statistics ---  
10 packets transmitted, 10 packets received, 0% packet loss  
round-trip min/avg/max = 45.6/52.0/65.8 ms

### Activity 2C:

Enter the following commands, copy all the display results to your activity report, and explain what results are obtained.

- ping www.mit.edu
- ping -n 10 www.mit.edu
- ping www.microsoft.com
- ping www.ucla.edu
- ping www.purdue.edu

### ARP (Address Resolution Protocol) Command

The ARP command provides information about Ethernet/IP address translation. We can use it to detect systems on the local network that are configured with the wrong IP address.

C:\Users\Lin\Documents>arp

Displays and modifies the IP-to-Physical address translation tables used by address resolution protocol (ARP).

```
ARP -s inet_addr eth_addr [if_addr]
ARP -d inet_addr [if_addr]
ARP -a [inet_addr] [-N if_addr] [-v]

-a          Displays current ARP entries by interrogating the current
            protocol data. If inet_addr is specified, the IP and Physical
            addresses for only the specified computer are displayed. If
            more than one network interface uses ARP, entries for each ARP
            table are displayed.
-g          Same as -a.
-v          Displays current ARP entries in verbose mode. All invalid
            entries and entries on the loop-back interface will be shown.
inet_addr   Specifies an internet address.
-N if_addr  Displays the ARP entries for the network interface specified
            by if_addr.
-d          Deletes the host specified by inet_addr. inet_addr may be
            wildcarded with * to delete all hosts.
-s          Adds the host and associates the Internet address inet_addr
            with the Physical address eth_addr. The Physical address is
            given as 6 hexadecimal bytes separated by hyphens. The entry
            is permanent.
eth_addr    Specifies a physical address.
if_addr     If present, this specifies the Internet address of the
            interface whose address translation table should be modified.
            If not present, the first applicable interface will be used.

Example:
> arp -s 157.55.85.212 00-aa-00-62-c6-09 .... Adds a static entry.
> arp -a .... Displays the arp table.
```

### Activity 2D:

Enter the following commands, copy all the display results to your activity report, and explain what results are obtained.

- arp -a
- Read ARP found at Microsoft Web site and prepare a short summary:  
<http://www.microsoft.com/resources/documentation/windows/xp/all/proddocs/en-us/arp.msp?mfr=true>

## ROUTE Command

Static routing:

It may be used for small to medium-sized networks not characterized by many redundant paths to most destinations. This can be setup by issuing explicit **route** commands. The route command can be found in both UNIX and Window computers. Some versions of the **route** command will also display the current routing tables.

### **Activity 2E:**

Enter the following commands, copy the display results, and explain what results are obtained:

- route
- route print
- route print -4
- route print -6

## **Tracing Route**

The command for telling us which route packets take going from our system to a remote system is **tracert** (Windows) or **traceroute** (UNIX). It prints information about each hop.

```
C:\Users\Lin\Documents>tracert
```

```
Usage: tracert [-d] [-h maximum_hops] [-j host-list] [-w timeout]
              [-R] [-S srcaddr] [-4] [-6] target_name
```

Options:

-d	Do not resolve addresses to hostnames.
-h maximum_hops	Maximum number of hops to search for target.
-j host-list	Loose source route along host-list (IPv4-only).
-w timeout	Wait timeout milliseconds for each reply.
-R	Trace round-trip path (IPv6-only).
-S srcaddr	Source address to use (IPv6-only).
-4	Force using IPv4.
-6	Force using IPv6.

### **Activity 2F:**

Enter the following commands, copy the display results, and explain what results are obtained:

- tracert www.mit.edu
- tracert www.microsoft.edu
- tracert www.purdue.edu
- tracert www.iu.edu